

FIG. 1

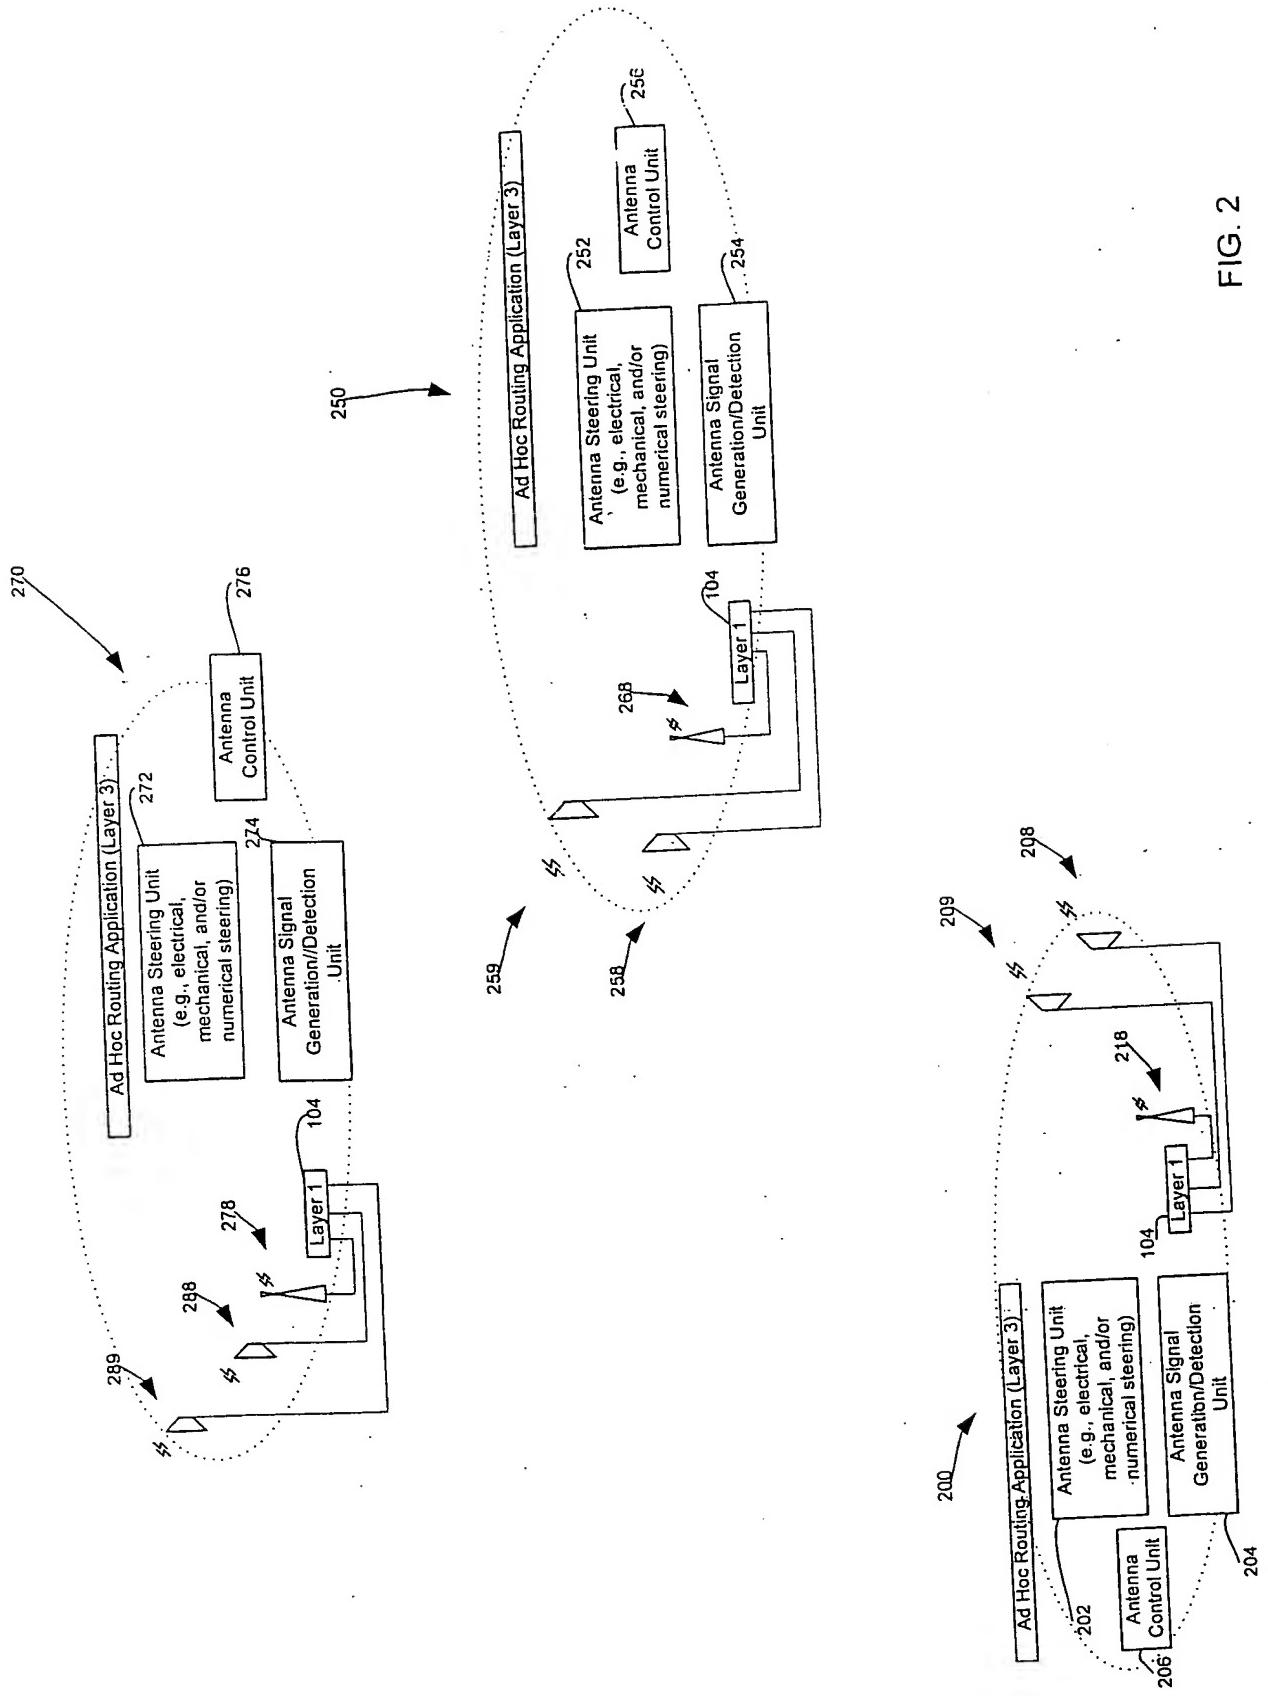


FIG. 2

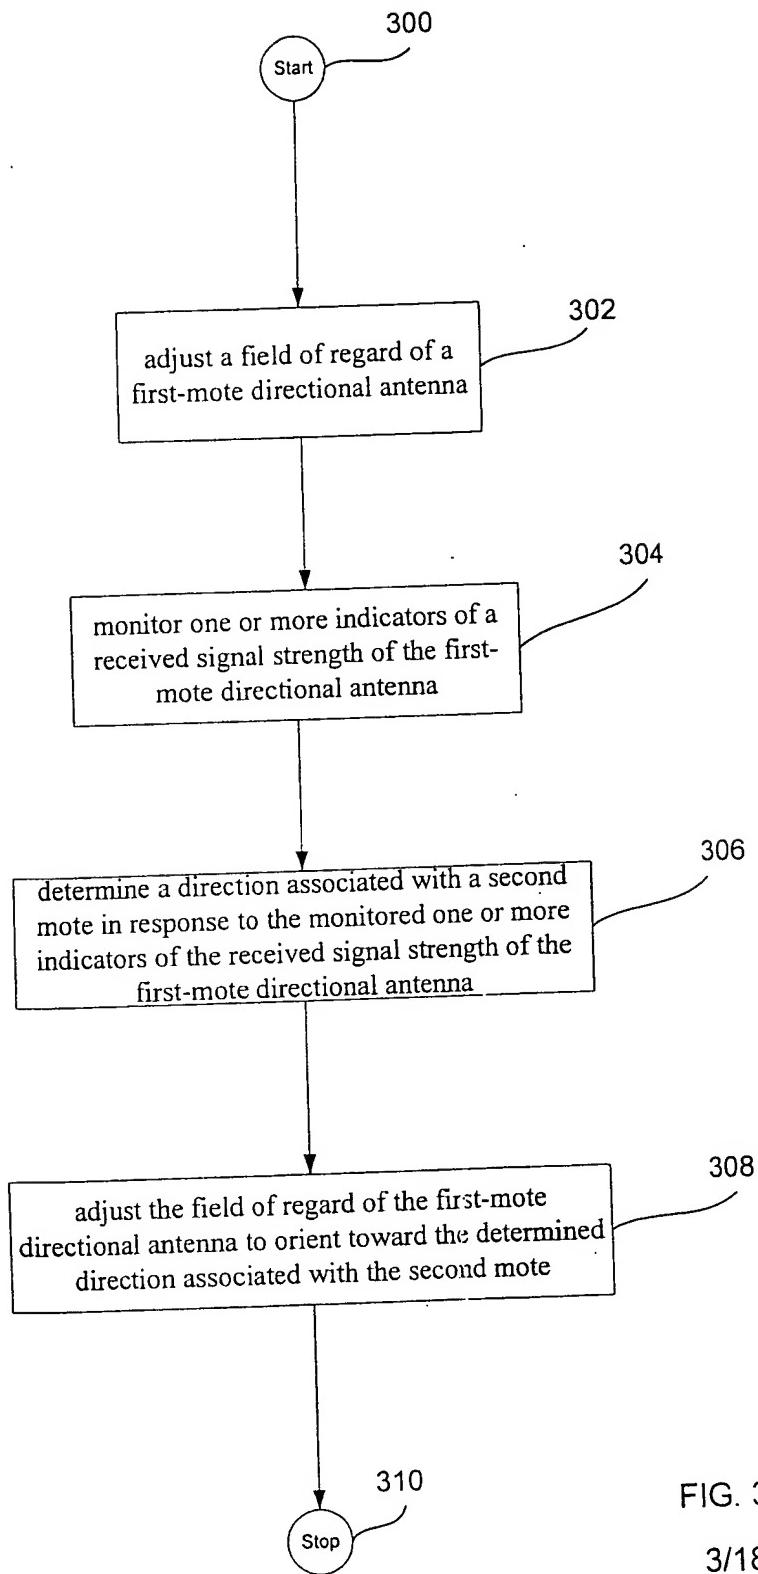


FIG. 3

300



adjust a field of regard of a first-mote directional antenna

302

move the field of regard such that the field of regard of the first-mote directional antenna will likely operably align with a beam of a second-mote directional antenna

FIG. 4

4/18

304

monitor one or more indicators of a received signal strength of the first-mote directional antenna

306

determine a direction associated with a second mote in response to the monitored one or more indicators of the received signal strength

308

determine a direction associated with a second mote in response to the monitored one or more indicators of the received signal strength of the first-mote directional antenna

310



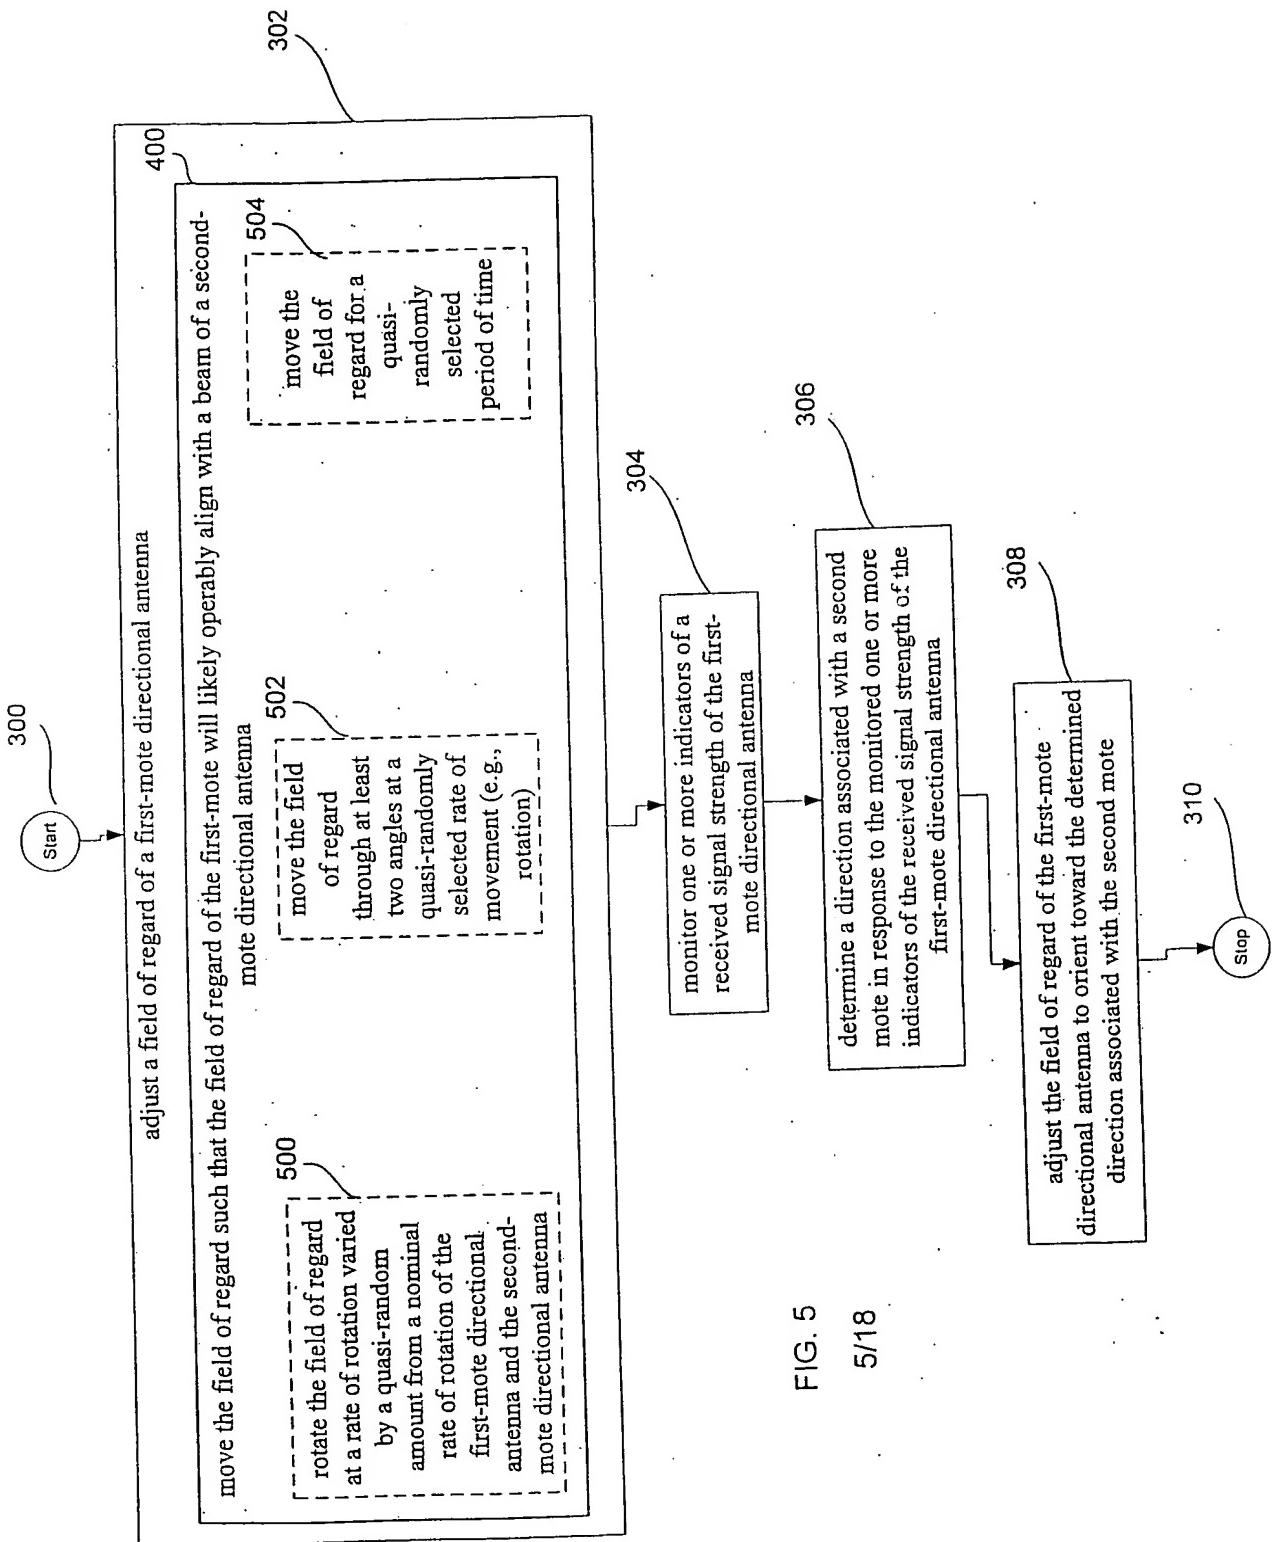


FIG. 5

5/18

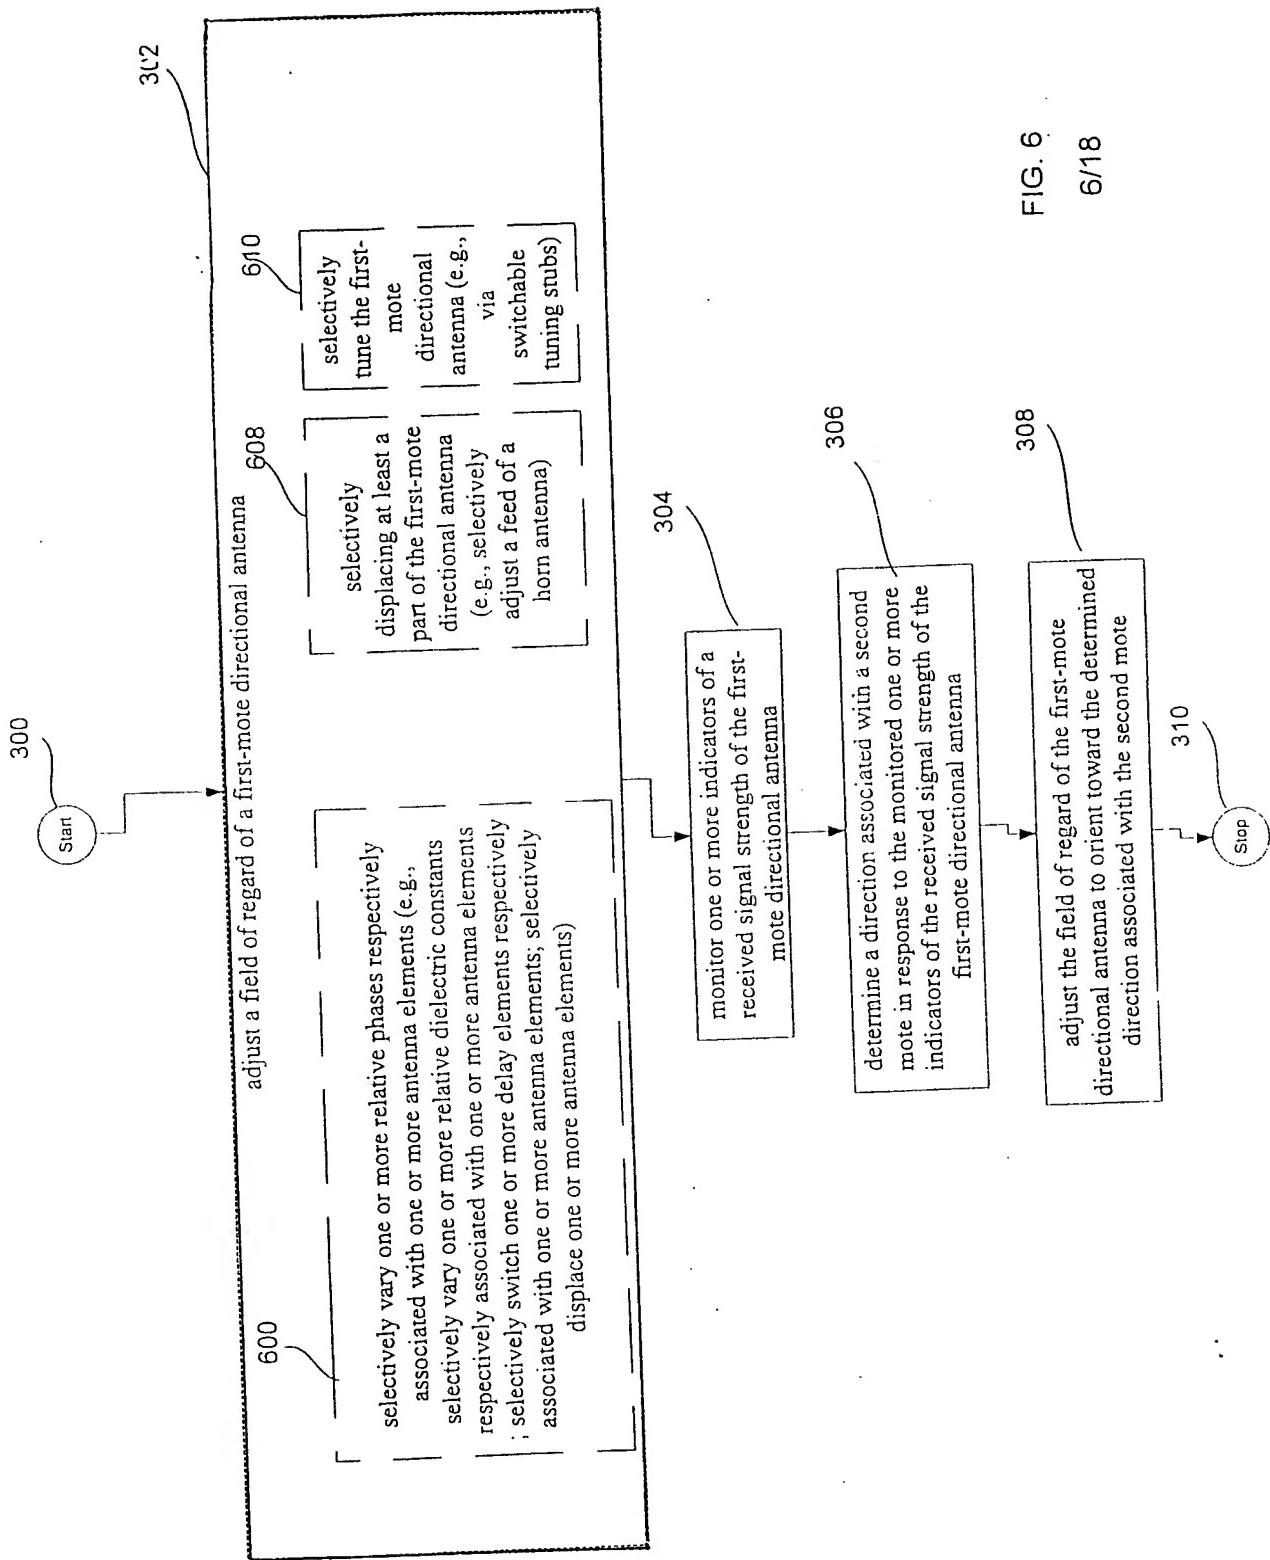


FIG. 7
7/18

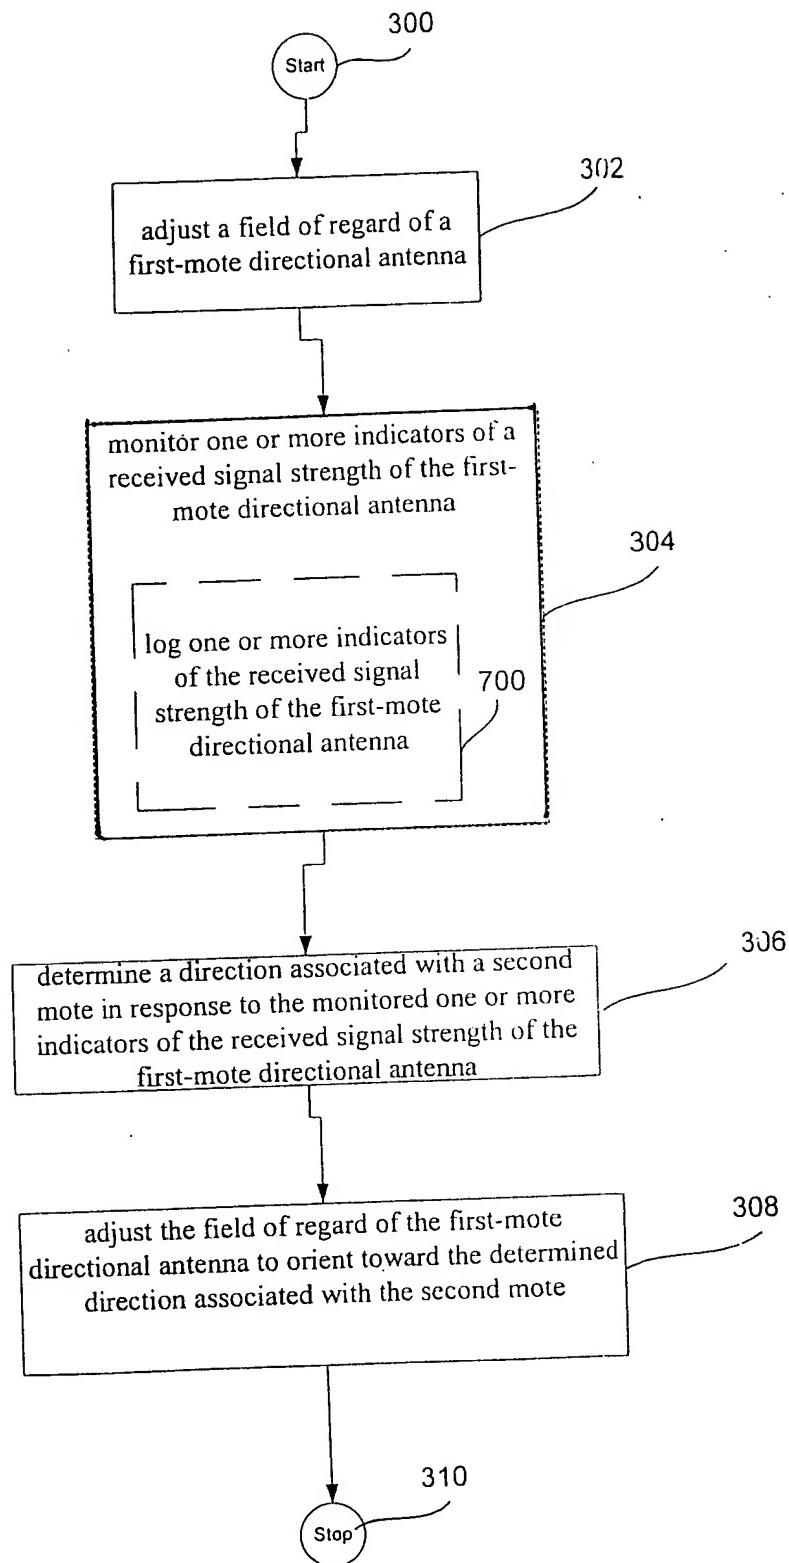
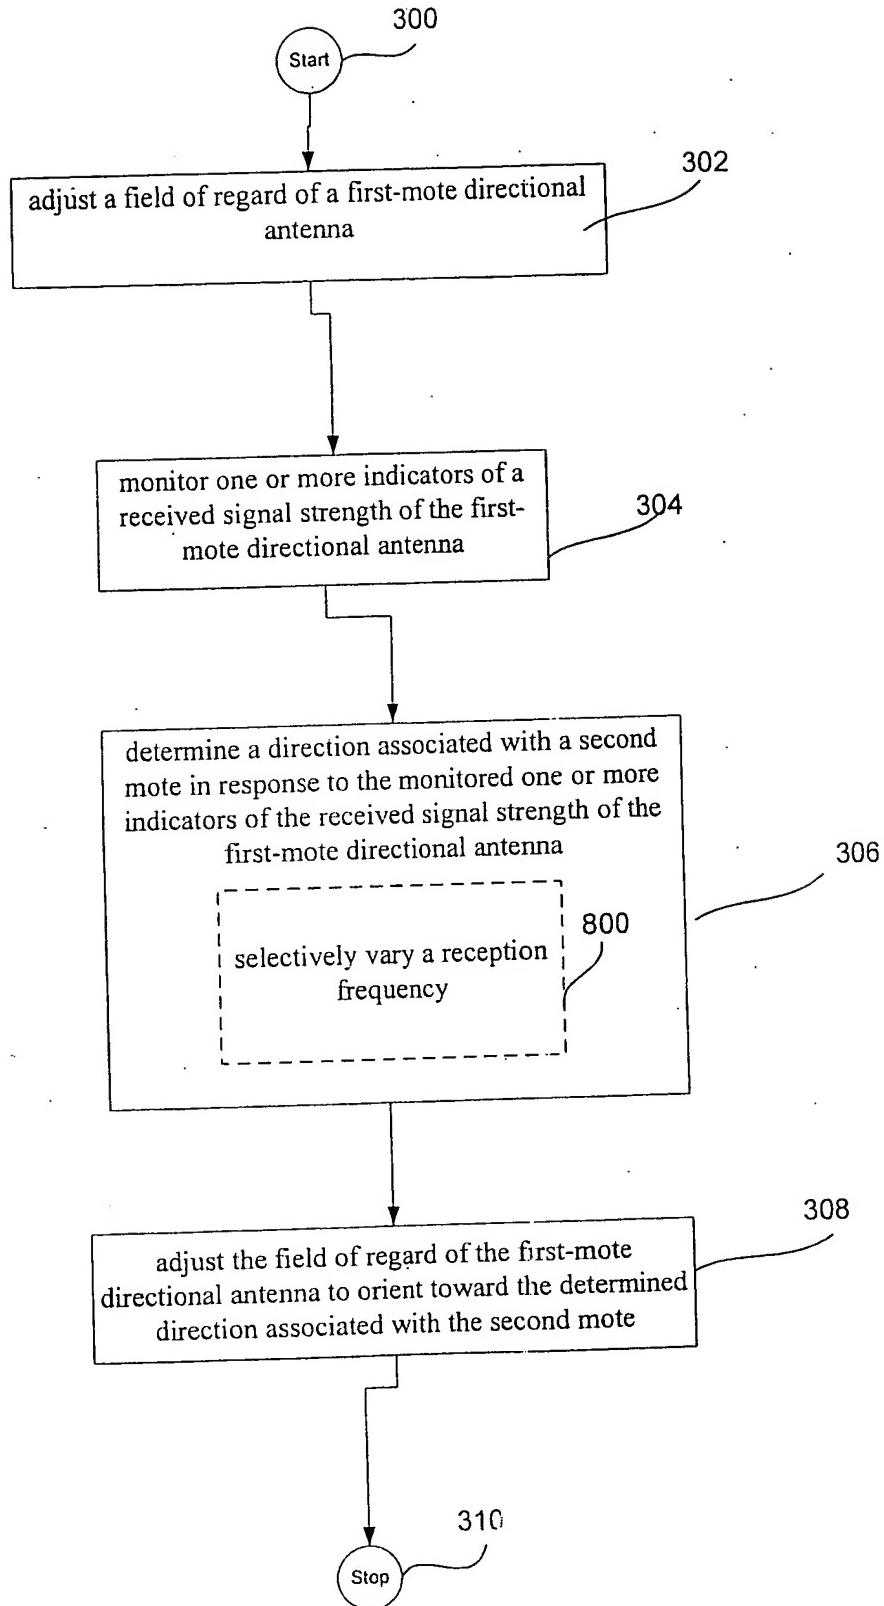


FIG. 8
8/18



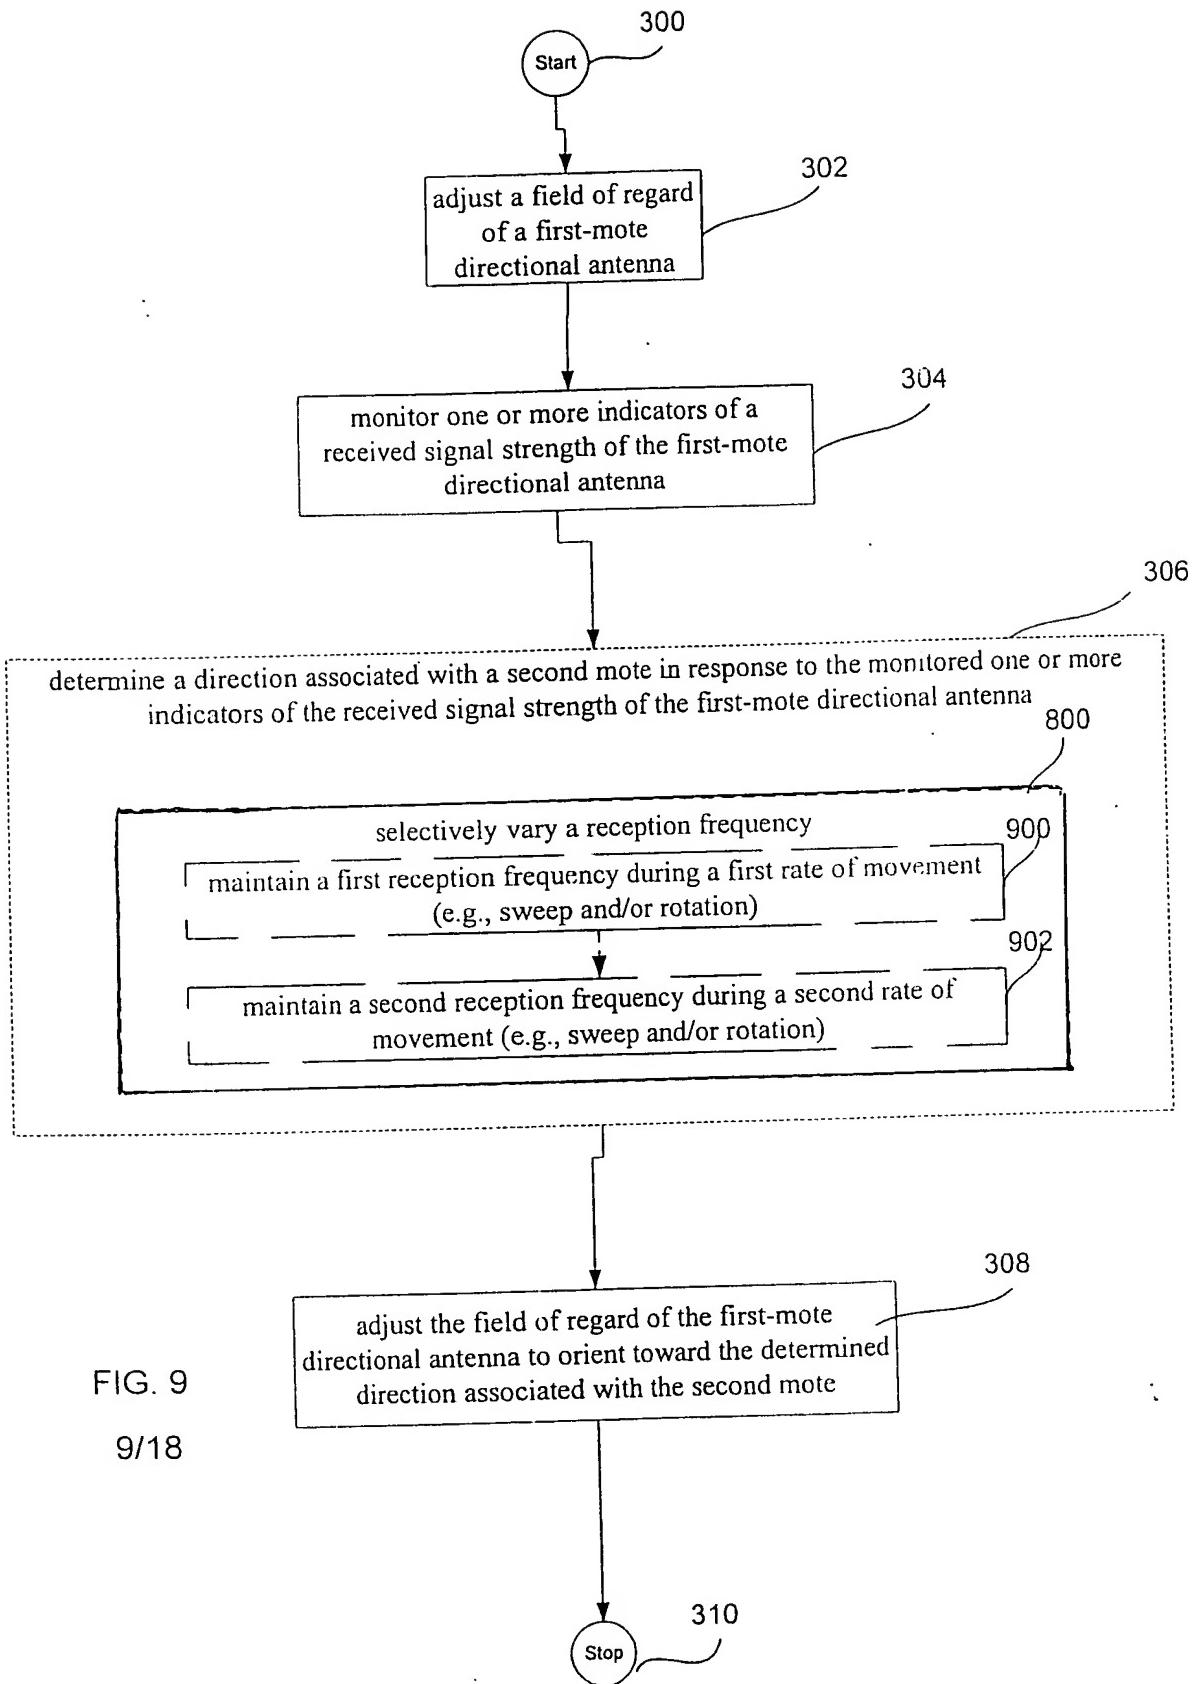
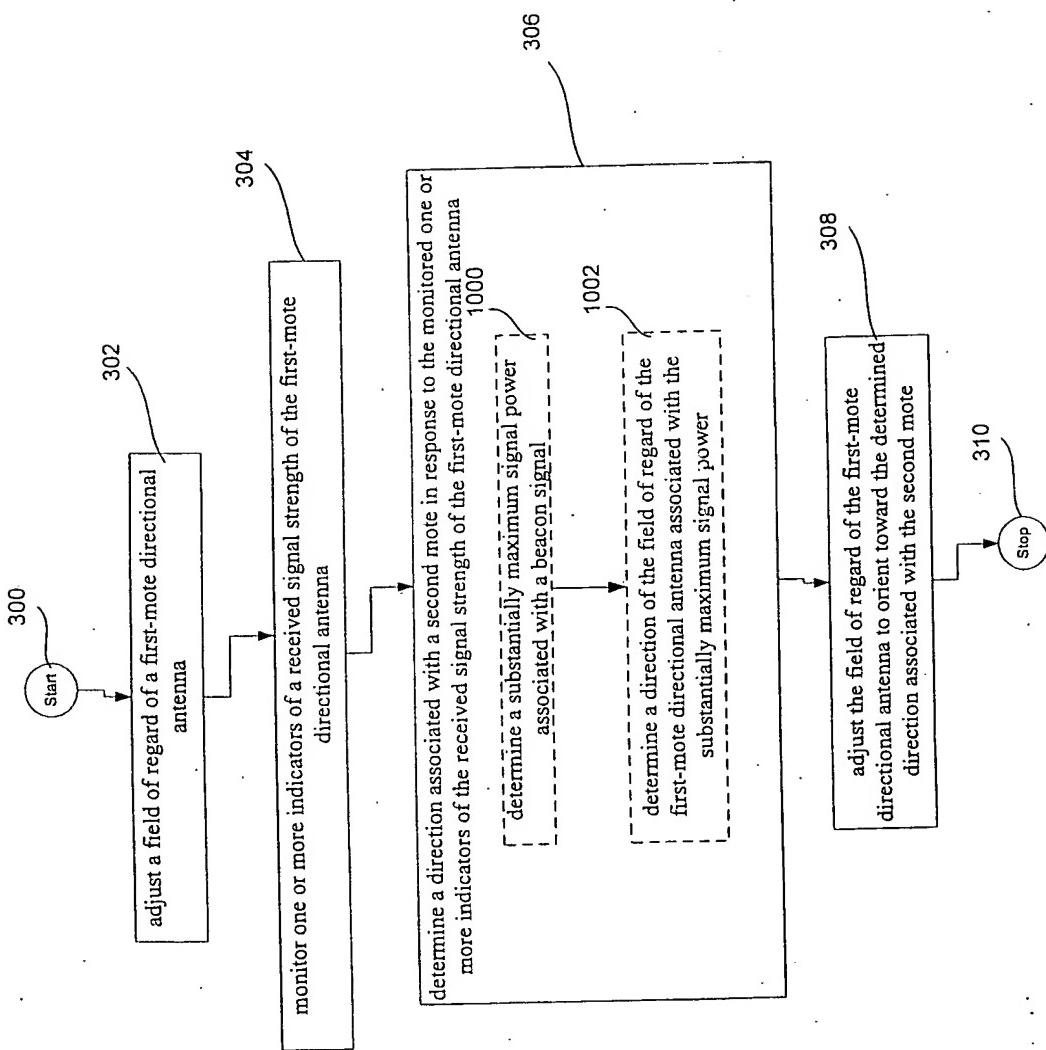


FIG. 9

9/18

FIG.
10
10/18



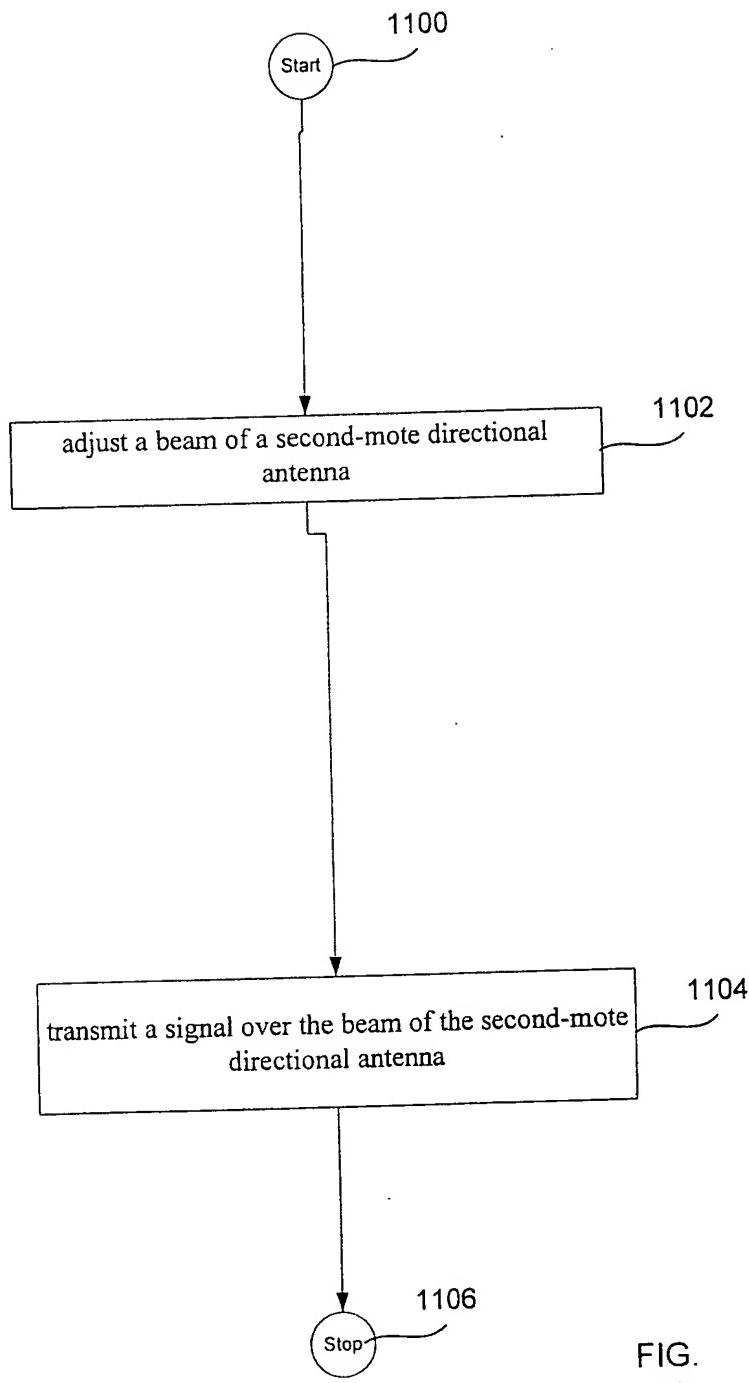


FIG.
11
11/18

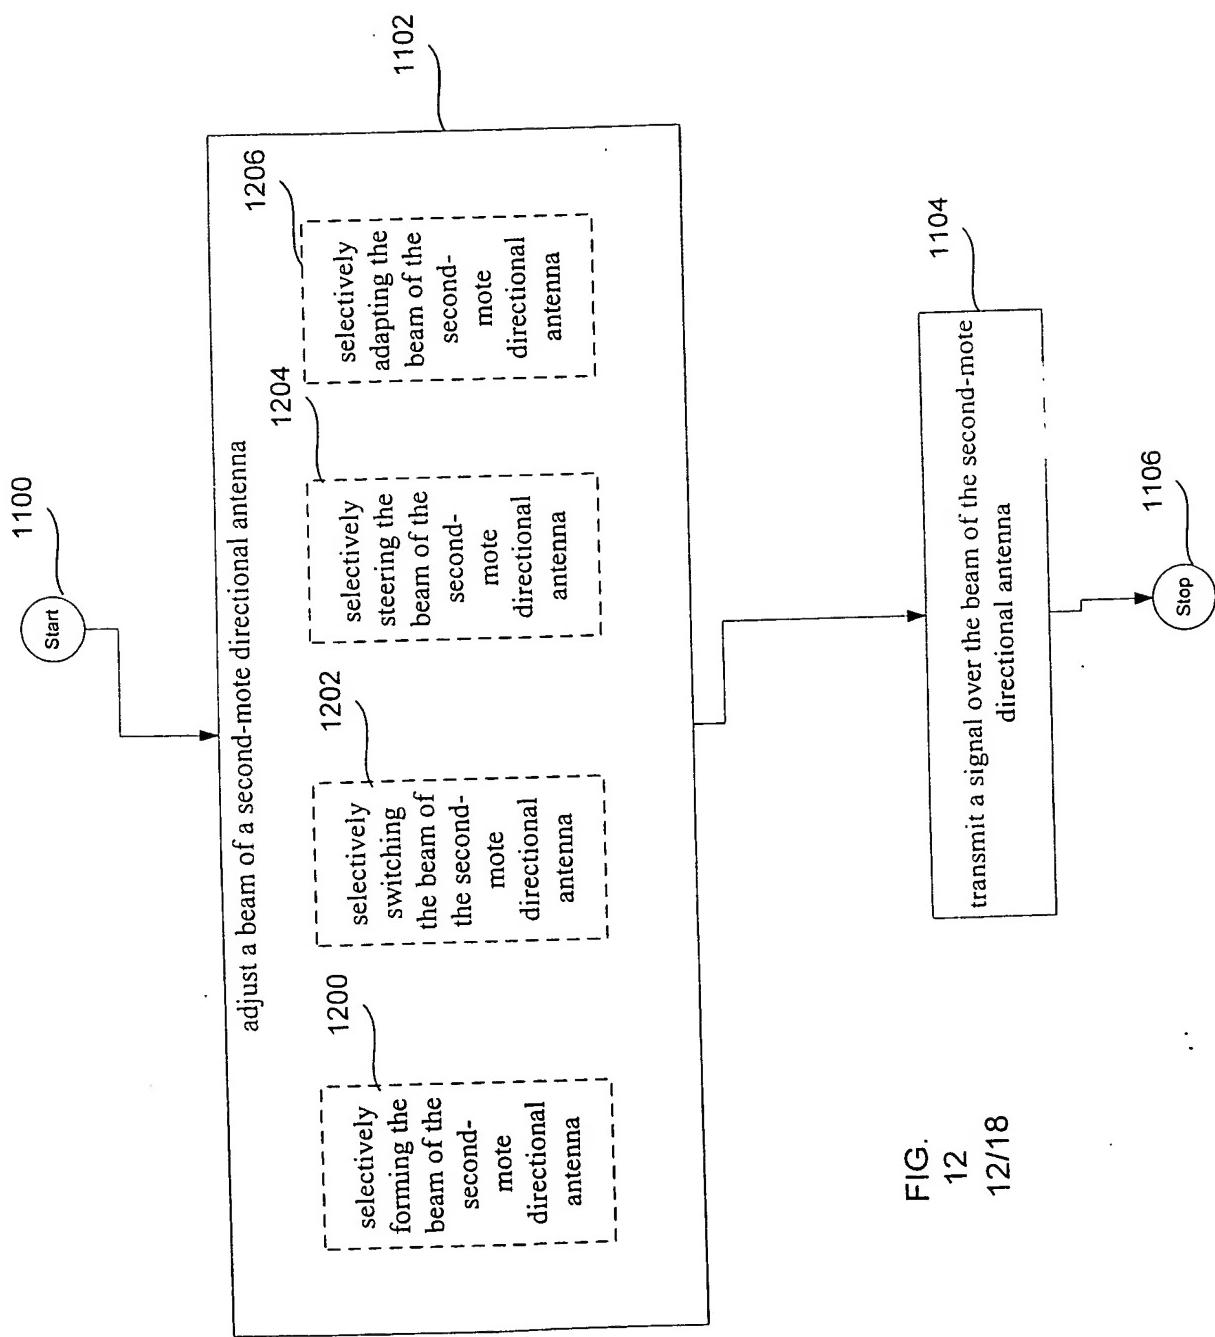


FIG.
12
12/18

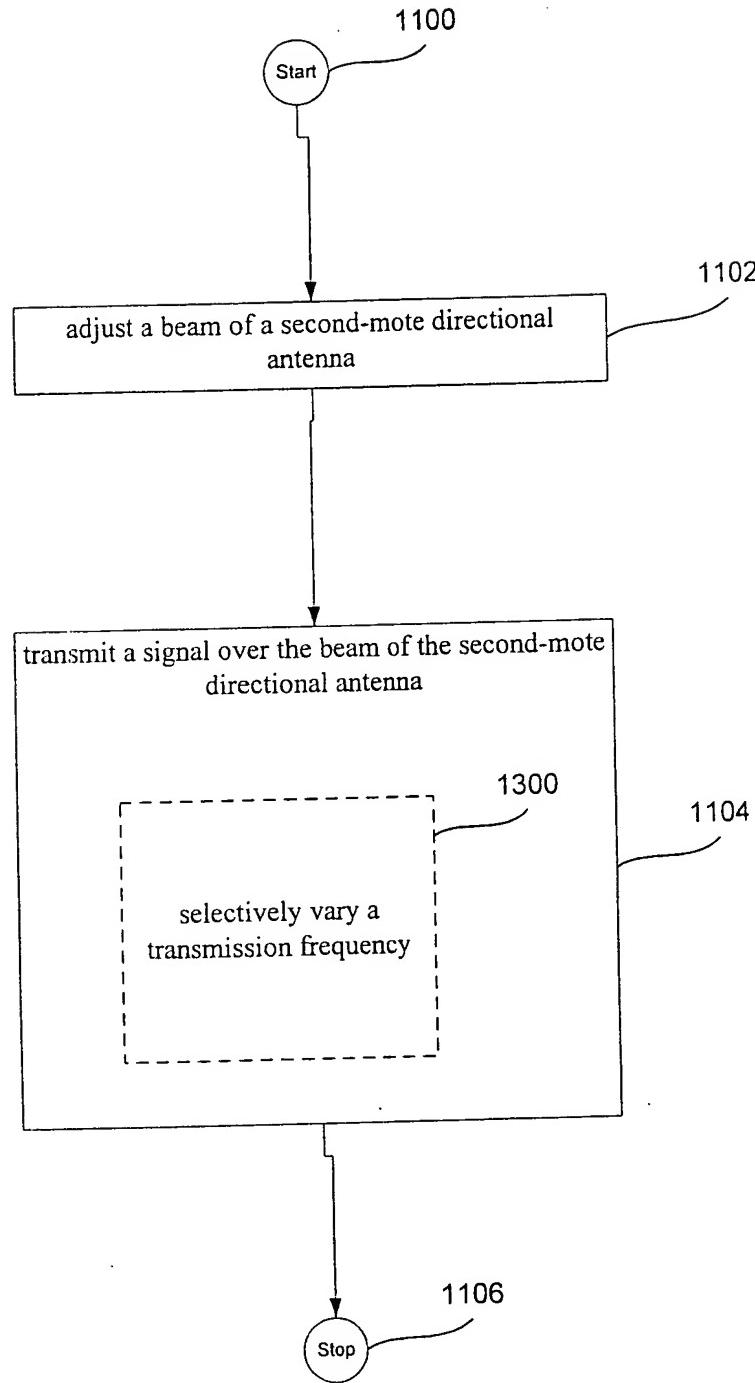


FIG.
13
13/18

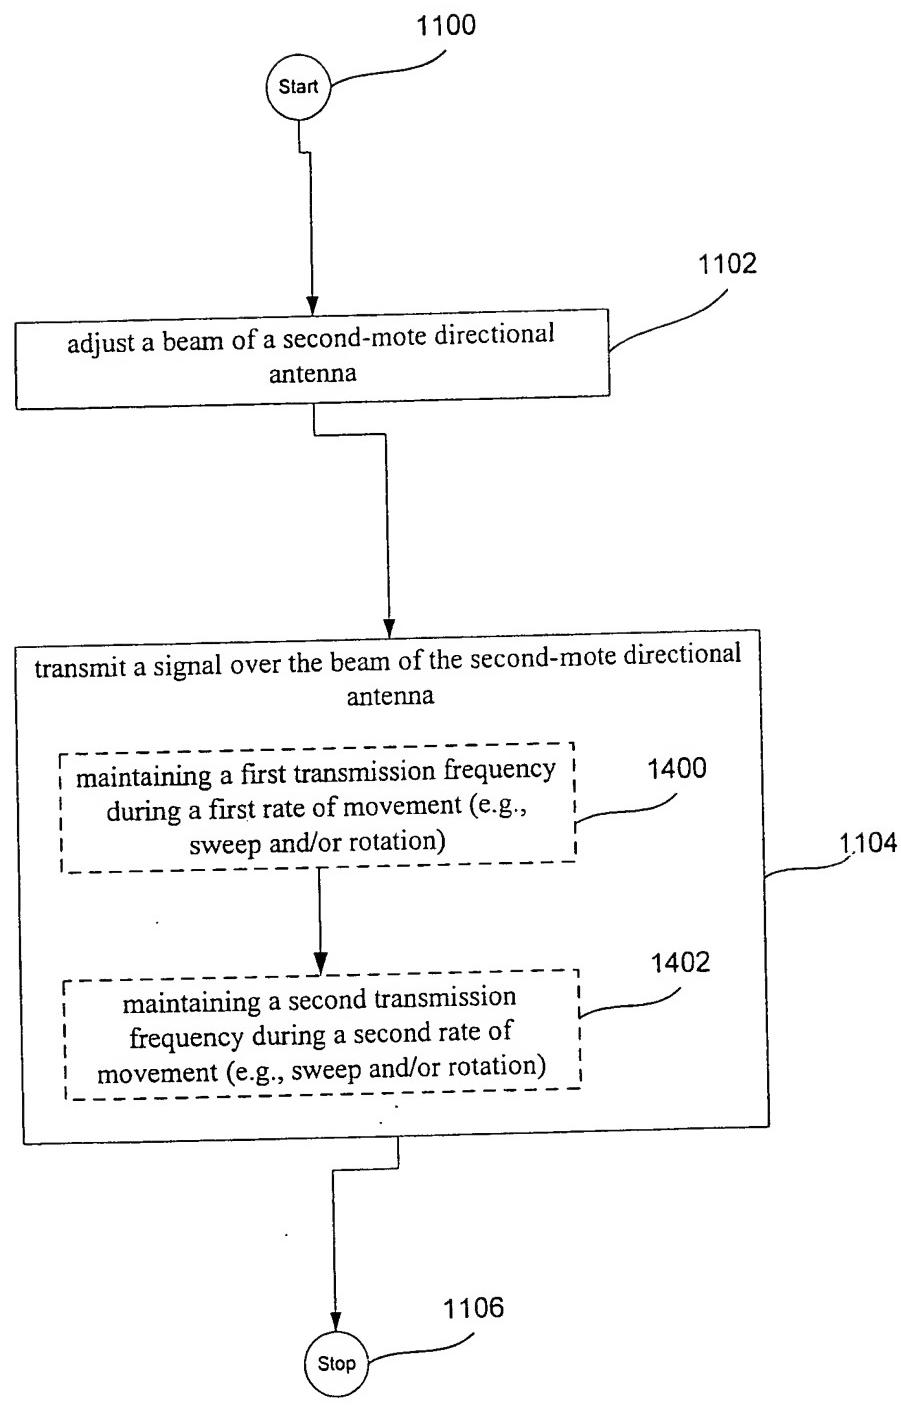


FIG.
14
14/18

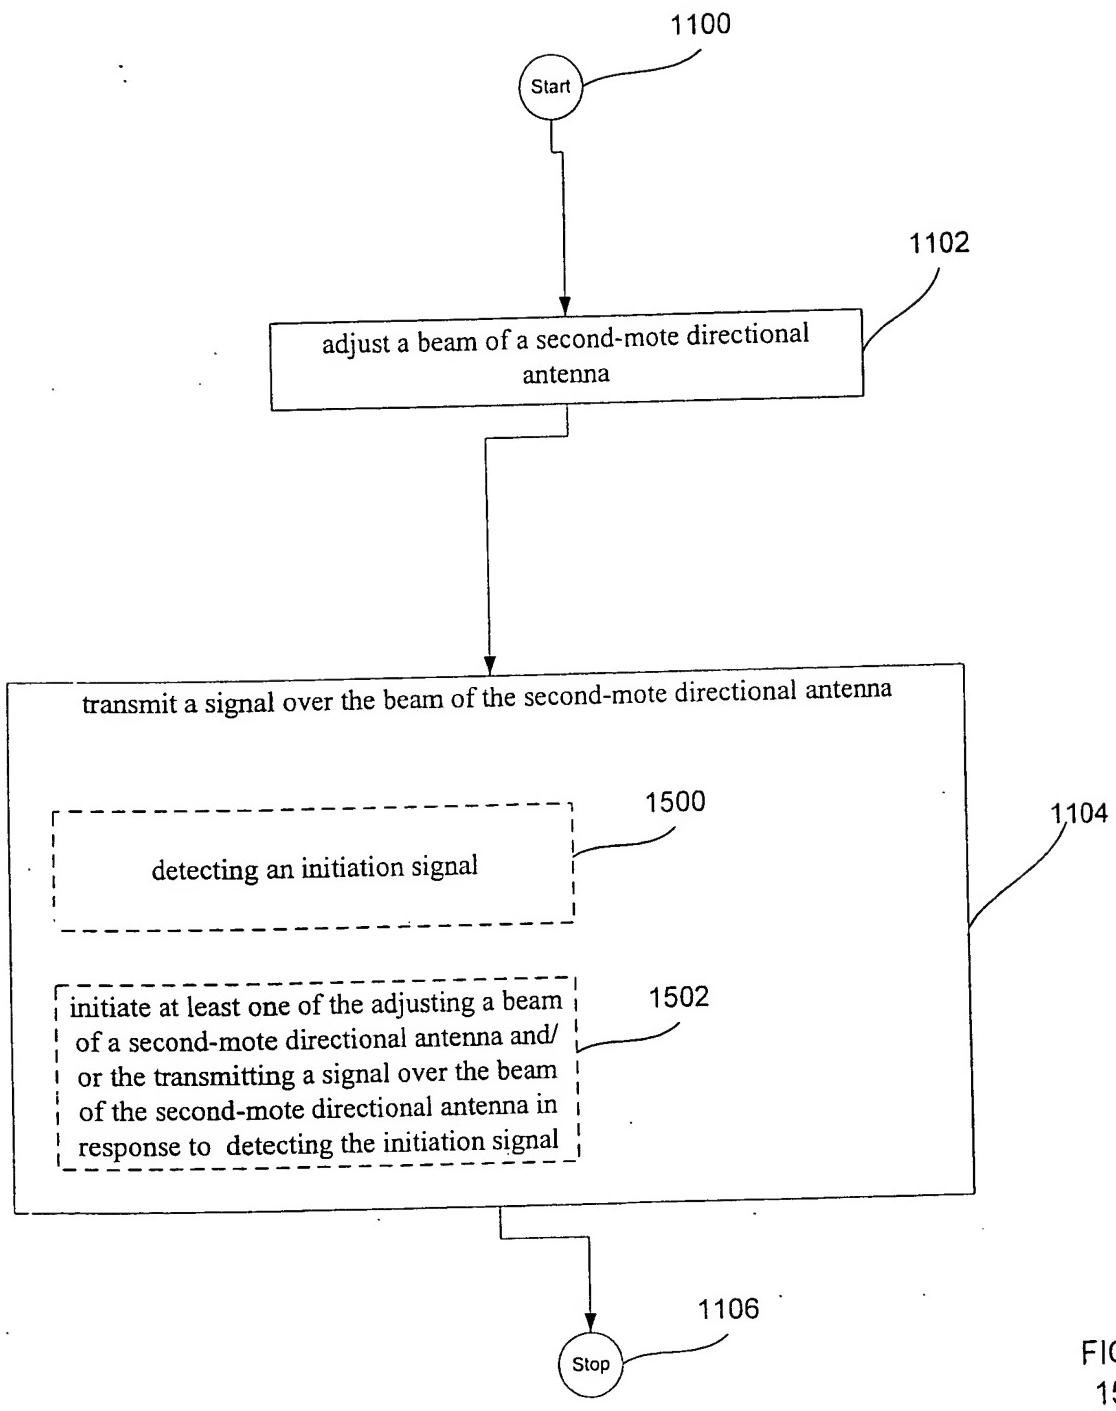


FIG.
15
15/18

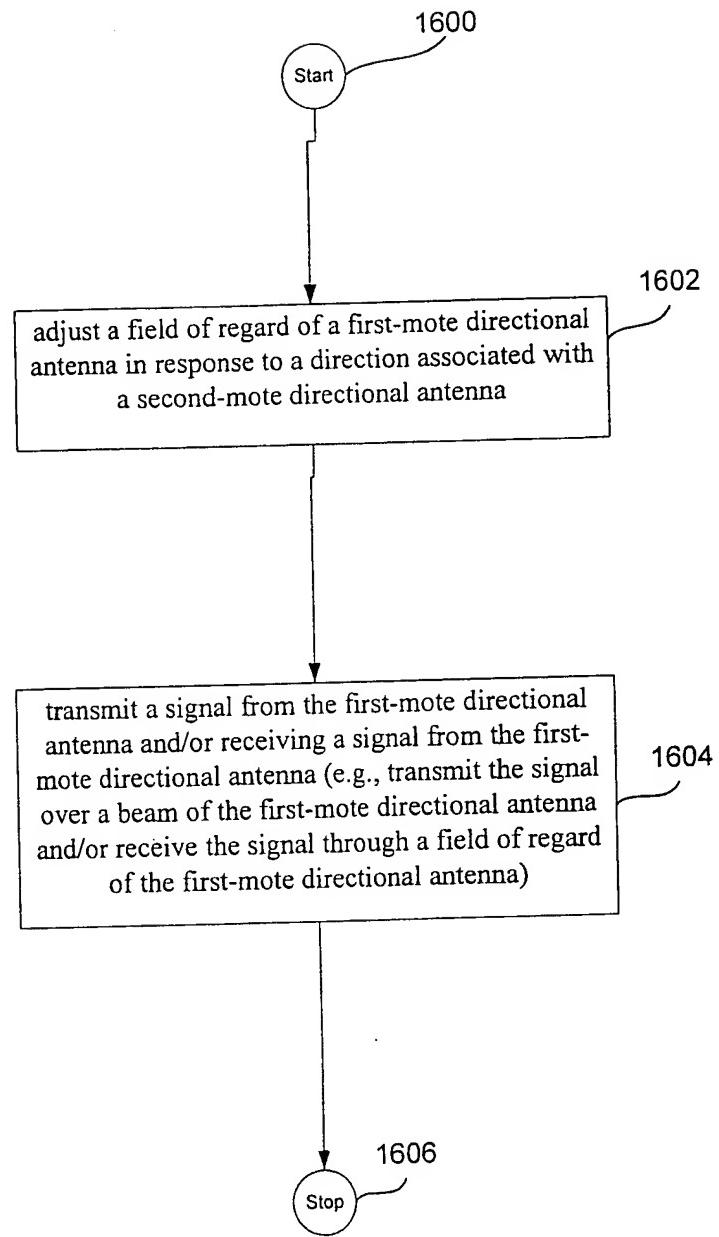


FIG.
16
16/18

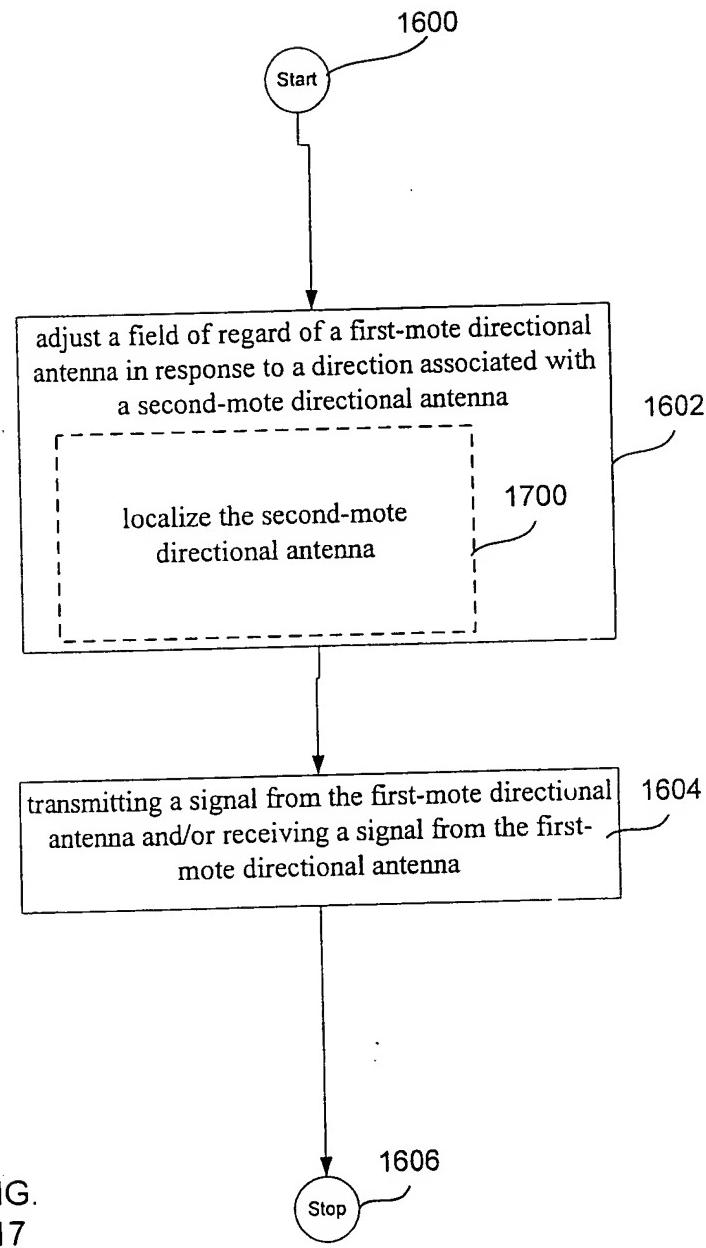


FIG.
17
17/18

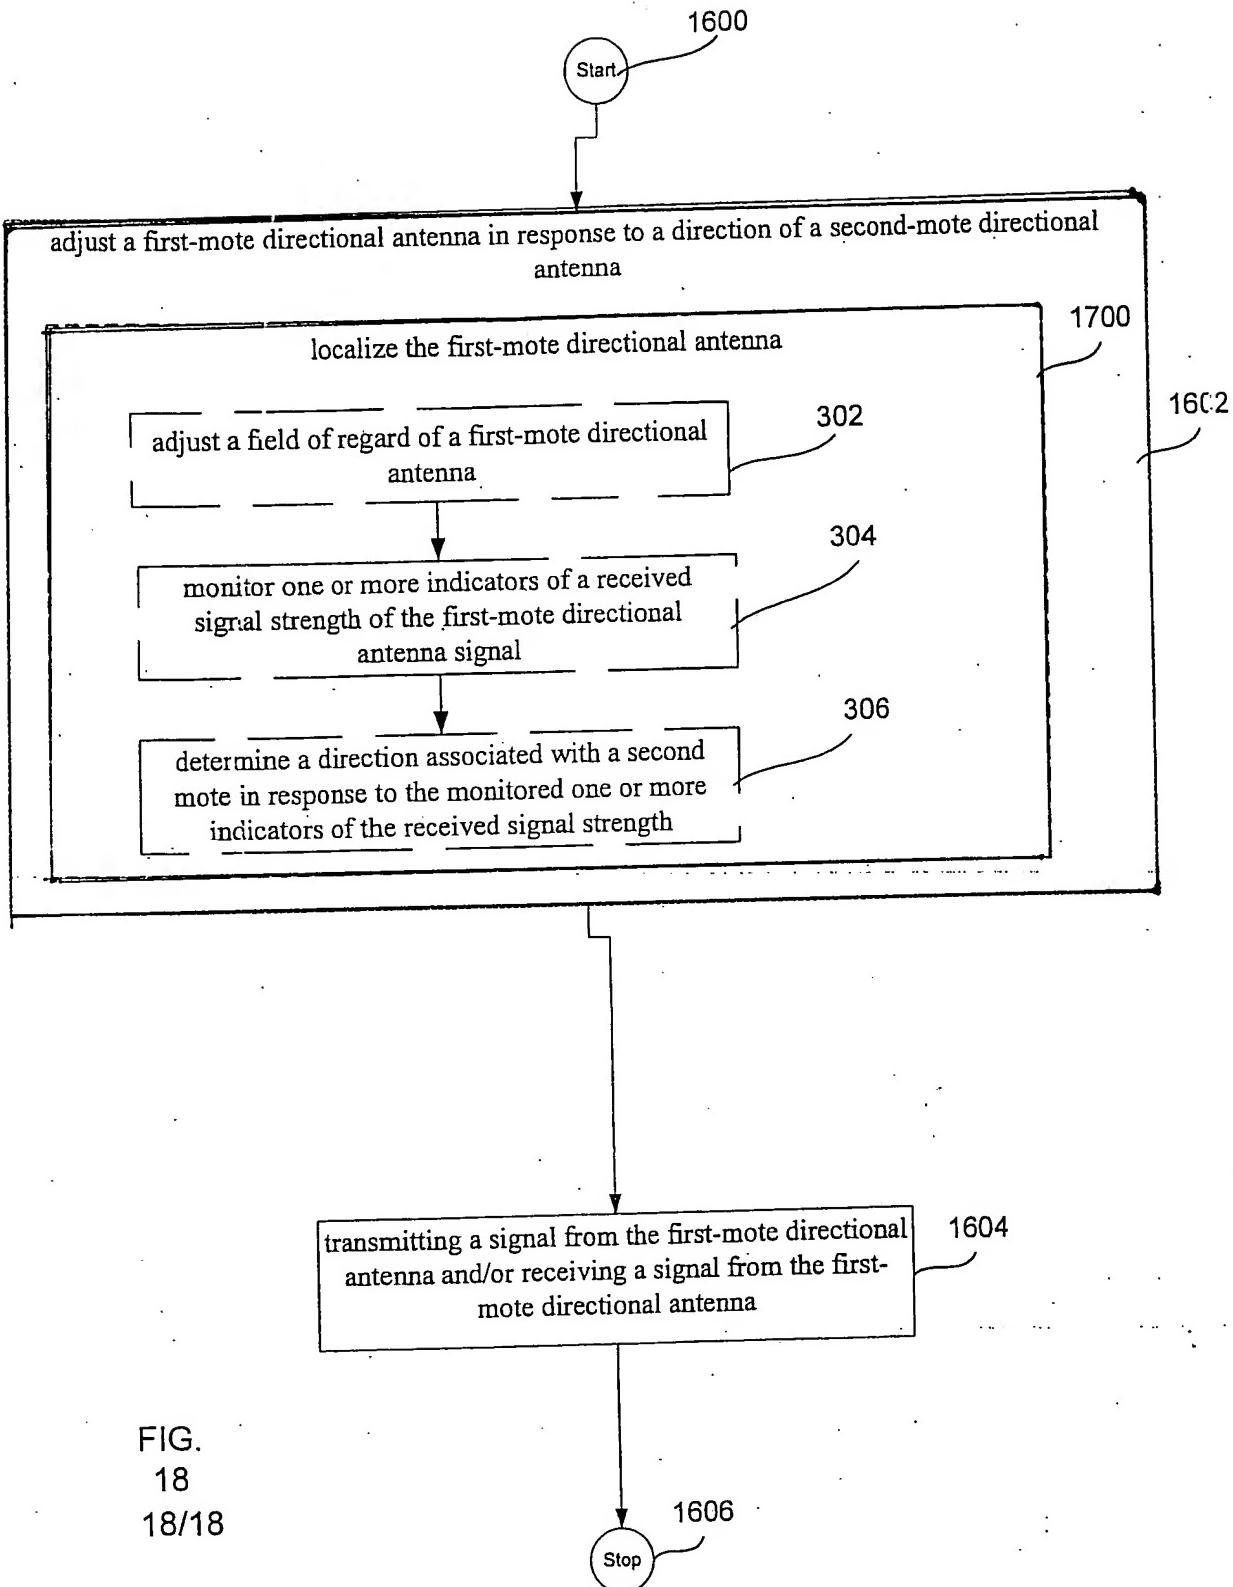


FIG.
18
18/18